

Osram Valves

Made in England.



TYPE X31 UNIVERSAL RANGE TRIODE-HEXODE FREQUENCY CHANGER. With Indirectly Heated Cathode.

The OSRAM X31 is a multi-electrode valve designed to perform as a mixer, first detector, or frequency changer valve in a superheterodyne receiver. Its filament rating of 13 volts 0.3 amp. makes it suitable for series running in D.C. and Universal Receivers. The valve consists of a cathode common to two sets of electrodes: (1) The Hexode, (2) The Triode.

The triode grid is connected to the mixer grid internally so that oscillations generated by the triode modulate the cathode hexode stream. The control grid of the hexode portion may be connected to an A.V.C. line as it has "variable mu" characteristics.

Type X31 is suitable for short wave receivers.

Maximum Dimensions :
Overall length (including pins)
135 m/m.
Diameter of bulb
45 m/m.

CHARACTERISTICS.


| | | |
|--------------------------------|-------------------|---------------|
| Heater Current | | 0.3 amp. |
| Heater Volts | | 13.0 |
| | | Recommended |
| | Max. | Operating |
| | | Conditions. |
| Anode Volts | 250 | 180—200 |
| Screen Volts | 80 | 70 |
| Oscillator Anode Volts | 150 | 100 |
| Oscillator Grid Peak Swing | 12v. peak | 10-12v. peak |
| Control Grid Voltage | | -1.5 |
| Conversion Conductance average | | 640 micromhos |
| Conversion Impedance | | 0.75 megohms |
| Total Cathode Current average | | 7.6 ma. |

Interelectrode Capacities :—

| | | |
|----------------------------------|---------|--------------------------------|
| Control Grid—Anode | | 0.046 micro-microfarad approx. |
| Anode—Earth | | 21.5 " " " |
| Control Grid—Earth | | 7.0 " " " |
| Oscillator Grid—Oscillator Anode | | 3.56 " " " |
| Oscillator Anode—Earth | | 8.5 " " " |
| Oscillator Grid—Earth | | 17.0 " " " |
| Oscillator Grid—Control Grid | | 0.26 " " " |

(Taken on metallised valve).

For prices see
pages 126-129.



VIEW LOOKING ON
UNDERSIDE OF BASE

BASE 7-PIN.


- 1 : Oscillator Anode (A_o)
 - 2 : Oscillator & Mixer Grids (G₁, G₂)
 - 3 : Screen, (G₂, G₁)
 - 4 : Heater
 - 5 : Heater
 - 6 : Cathode
 - 7 : Anode (A)
- Top Cap : Control Grid, (G₁)

Type X31 is supplied in metallised bulb only.


TYPE X31

TYPICAL OPERATING CONDITIONS.

A typical circuit is shown herewith. The Screen grid should be fed from a low resistance potentiometer and care should be taken to reduce to a minimum any coupling between the oscillator and signal frequency circuits. In A.C.-D.C. receivers with the valve heaters connected in series the X31 should be so connected that A.C. voltage between heater and cathode is as low as possible. Care should be taken that the total resistance in the control grid to cathode circuit (A.V.C. decoupling resistances, etc.) does not exceed 2 megohms effective value.

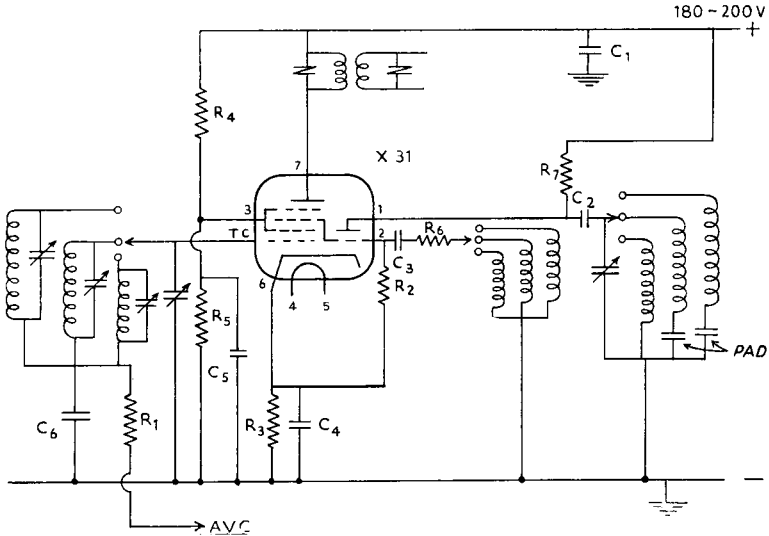

- | | | | |
|-----------------------------|------------------------------------|----------------------------|--------------------------|
| R ₁ 0.5 megohm | R ₅ 20,000 ohms. | C ₁ 0.1 mfd. | C ₄ 0.1 mfd. |
| R ₂ 50,000 ohms. | R ₆ 50-5000 ohms. | C ₂ 0.1 mfd. | C ₅ 0.1 mfd. |
| R ₃ 200 ohms. | R ₇ 40,000-70,000 ohms. | C ₃ 0.0001 mfd. | C ₆ 0.05 mfd. |
| R ₄ 20,000 ohms. | | | |

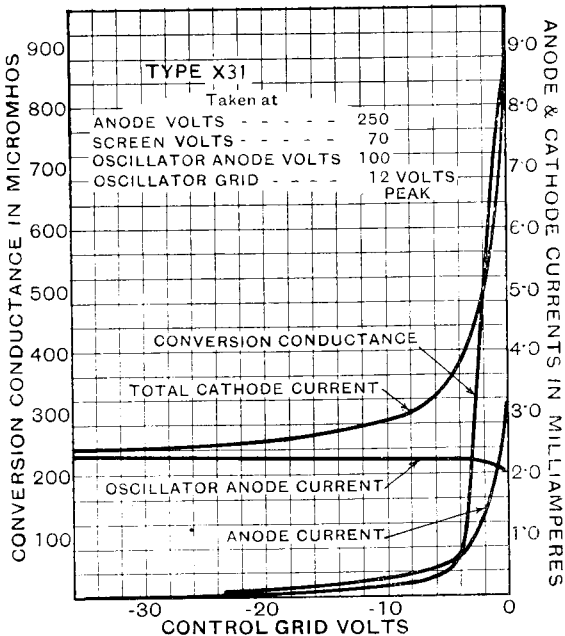

CHARACTERISTIC CURVES OF AVERAGE VALVE.