

ADMIRALTY SIGNAL & RADAR ESTABLISHMENT

Specification AD/CV2185 Issue No.3 dated 20.12.55. To be read in conjunction with K1001 and R.S.1409	<u>SECURITY</u>	
	<u>Specification</u> Unclassified	<u>Valve</u> Unclassified

—————> Indicates a change


<u>TYPE OF VALVE:-</u> Cathode Ray Tube <u>TYPE OF DEFLECTION:-</u> Electrostatic <u>TYPE OF FOCUS:-</u> Electrostatic <u>BULB:-</u> Internally coated with conductive coating <u>SCREEN:-</u> GGN <u>PROTOTYPE:-</u> Type 88D			<u>MARKING</u> See K1001/4.	
			<u>BASE</u> 11 Contact Clip Type on Faxolin Cylinder.	
			Clip	Electrode
<u>RATING</u>			1	y2
			2	x2
			3	a3
			4	x1
			5	y1
			6	g
			7	k
			8	h
			9	h
			10	a1
			11	a2
			<u>DIMENSIONS</u> See drawings on pages 4 and 5	
Heater Voltage (V) 6.3 Heater Current (A) 0.55 Max. Third Anode Voltage (kV) 4 Max. Second Anode Voltage (kV) 1 Max. First Anode Voltage (kV) 3 Max. Negative Grid Voltage (V) 100 Sensitivity, x plates (mm/V) $\frac{630}{V_{a3}}$ Sensitivity, y plates (mm/V) $\frac{950}{V_{a3}}$ Max. Voltage between x plates (V) 750 Max. Voltage between y plates (V) 500			Note	
<u>Typical Working Conditions</u> Third Anode Voltage (kV) 2 Second Anode Voltage (V) 350 First Anode Voltage (kV) 2 Negative Grid Voltage (V) 0-50 Beam Current (μA) 0-50				

TESTS


To be performed in addition to those applicable in K1001.

	Test Conditions					Test	Limits		No. Tested
	Vh (V)	Va3 (kV)	Va2 (V)	Va1 (kV)	Vg (V)		Min.	Max.	
a	See K1001/5A.13.					<u>Capacitances (pF)</u> i. Each x plate to all other electrodes. ii. Each y plate to all other electrodes. iii. Cathode to all other electrodes. iv. Grid to all other electrodes.	-	17.5	T.A.
b	6.3	0	0	0	0	Ih (A)	0.5	0.6	10% (20)
c	6.3	2	Adjust to opt. focus	2	Adjust to cut-off.	Vg Cut-off	-	-50	100%
d	6.3	2	-do-	2	Adjust	i. Vg (V)	To be at least 1 volt negative to cathode.		
						ii. Va2 (V) iii. Line Width (mm) iv. Beam current must increase steadily from zero to value which gives the specified light output.	225	4.25 .7	100% 100%
e	6.3	2	As in (d) (ii)	2	50	<u>Grid Insulation</u>			
						Leakage Current (uA)	-	5	100%
	or, with recommended method of K1001/5A.3.2. and with 10 megohms. resistor.					Increase in voltmeter reading (%)	-	100	100%
f	6.3	2	Adjust for optimum focus	2	Adjust to give just visible spot.	<u>Deflection Sensitivities</u> x plate (mm/V) y plate (mm/V)	$\frac{580}{Va3}$ $\frac{870}{Va3}$	$\frac{680}{Va3}$ $\frac{1040}{Va3}$	5%



	Test Conditions					Test	Limits		No. Tested	
	Vh (V)	Va3 (kV)	Va2 (V)	Va1 (kV)	Vg (V)		Min.	Max.		
g	6.3	2	Adjust for optimum focus	2	Adjust to give just visible spot	Deviation of spot from centre of screen. (mm)	-	7.5	100%	
h	6.3	2	-do-	2	-do-	Useful Screen Area Diameter (mm)	85	-	100%	
	Deflection to cover stated circle centred on centre of screen.									
j	6.3	2	-do-	2	-do-	Angle between x and y axes of deflection.	88	92	100%	
k	6.3	2	-do-	2	-do-	Orientation of x axis of deflection relative to plane through clip 3 and axis of tube.	-	$\pm 10^\circ$	100%	
l	6.3	2	-do-	2	-do-	<u>Trapezoidal Distortion</u> A screen area of at least 60 mm x 60 mm to be scanned with symmetrical deflection.	i. Angle between adjacent sides. ( $^\circ$ ) ii. Angle between opposite sides. ( $^\circ$ )	87.5 175	92.5 185	20% 20%
m	6.3	2	-do-	2	-do-	<u>Trapezoidal Distortion</u> A screen area of at least 60 mm x 60 mm to be scanned with asymmetrical deflection and with x2 and y2 at a 3 potential.	i. Angle between adjacent sides ( $^\circ$ ) ii. Angle between opposite sides. ( $^\circ$ )	86 173	94 187	T.A. T.A.
n	6.3	5	1000	3	Adjust to cut-off.	<u>Maximum Voltage Test</u> See K1001/BA.14.			100%	

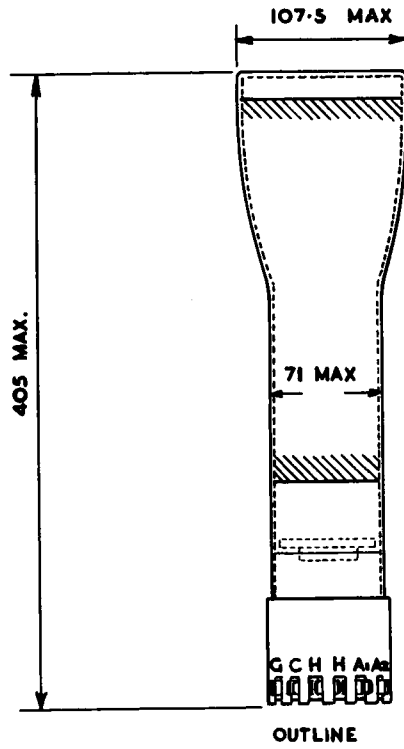

DIMENSIONS IN MM.



LOOKING AT BASE END OF TUBE

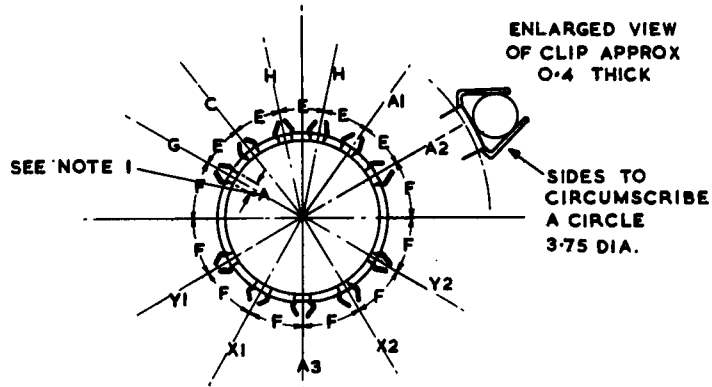

SLEEVE & END PLATE PAXLIN "Q" QUALITY 1-6 THICK.

DIMENSIONS IN MMS. EXCEPT WHERE OTHERWISE STATED.	A	B	C	D	E	F
	5.5	11.0	70.0	72.6	24°	30°
	± 0.13	± 0.2	± 0.5	± 0.3	± 0.75	± 0.75

**NOTE.**

DIMENSION "A" REFERS TO THE SLOT IN THE PAXLIN INTO WHICH THE CLIP IS FITTED.