

SPECIFICATION C.V. 4060 ISSUE 2.

AMENDMENT NO. 1.

PAGE 2.

GROUP B

Heater Current

Change minimum from 1.5A to 1.4A.

PAGE 3

GROUP D

Shock Test

Change IA from "Symbol" column to "Insp. Level" column.

Post Shock Test.      Noise and Microphony.

Change AQL from 2.5 to 6.5 and max. from 300 to 1500.

April, 1957.  
N.87416

T.V.C. Office  
for A.S.R.E.

VALVE ELECTRONICADMIRALTY SIGNAL AND RADAR ESTABLISHMENT

C.V.4060.

Specification AD/CV4060  
 Issue No. 2 dated 12.10.56.  
 To be read in conjunction with K1001,  
 B.S.448 and B.S.1409.

<u>SECURITY</u>	
<u>Specification</u>	<u>Valve</u>
Unclassified	Unclassified

→ Indicates a change

TYPE OF VALVE:- Reliable Beam Tetrode,  
 (for series regulator  
 applications)

MARKING  
 See K1001/4

CATHODE:- Indirectly heated.

BASE

ENVELOPE: Glass

B.S.448/B8 - 0

PROTOTYPE:- VX6114

<u>RATINGS</u>		<u>Note</u>	<u>CONNECTIONS</u>	
			<u>Pin</u>	<u>Electrode</u>
All limiting values are absolute				
Heater Voltage	(V)	6.3		
Heater Current	(A)	1.6		
Max. Peak Anode Voltage	(V)	1500	A	
Max. Anode Voltage	(V)	800		IC
Max. Screen Voltage	(V)	300		h
Max. Control Grid Voltage	(V)	100		a
Max. Anode Dissipation	(W)	28		g <sub>2</sub>
Max. Screen Dissipation	(W)	5		g <sub>1</sub>
Max. Heater-Cathode Voltage -				bp
(a) Cathode positive	(V)	350		h
(b) Cathode negative	(V)	150		k
Max. Cathode Current	(mA)	300		
Max. Resistance g <sub>1</sub> to Cathode -				
(a) Fixed bias	(k ohms)	100		
(b) Cathode follower	(M ohms)	1		
Max. Acceleration (continuous operation)	(g)	2.0		
Max. Shock (Short duration)	(g)	500		
Anode Current	(mA)	200	C	
Screen Current	(mA)	12	C	
Mutual Conductance	(mA/V)	12.5	C	
Inner/ <u>u</u>		5.2		

DIMENSIONS

See drawing on page 4.

<u>CAPACITANCES</u> (pF)		<u>MOUNTING POSITION</u>	
Ca, g <sub>1</sub>	1.8		
C in	19.5		
C out	16.5		Any

NOTES

- A. This voltage may be applied in pulses not exceeding 200 uS, the duty cycle being less than .0%.
- B. Pin 6 must be connected to cathode.
- C. Measured at V<sub>a</sub>=V<sub>g2</sub>= 150V, V<sub>g1</sub>= -8.5

C.V.4060.

TESTS


To be performed in addition to those applicable in K1001, and in the specified order unless otherwise agreed with the Inspecting Authority.

Test conditions unless otherwise stated.

V <sub>h</sub> (V) 6.3	V <sub>a</sub> (V) 150	V <sub>g2</sub> (V) 150	I <sub>a</sub> (mA) 200
------------------------------	------------------------------	-------------------------------	-------------------------------

K1001	Test	Test Condition	AQL %	Insp. Level	Symbol	Limits		Units
						Min.	Max.	
7.1	Glass strain	No voltages	6.5	1				
11.1	<u>GROUP A</u> Noise and Microphony.	Frequency =50c/s Accel: =2g V <sub>a(b)</sub> =200V, V <sub>g2</sub> = 100V, RL = 1.2 k <sup>2</sup> I <sub>a</sub> = 100 mA	100%	V <sub>a</sub> (AC)		-	450	mV(rms)
5.2	Insulation.	V <sub>g1-all</sub> = -100V V <sub>g2-all</sub> = -500V V <sub>a-all</sub> = -500V No other voltages	100%	R		60	-	M ohms
	Reverse Grid Current. Reverse Grid Current.	V <sub>g1</sub> = -60V	100%	I <sub>g1</sub>	-	4.0	/uA	
			100%	I <sub>g1</sub>	-	2.0	/uA	
	<u>GROUP B</u> Heater Current. Heater Cathode Leakage.	Combined AQL V <sub>hk</sub> =350V (k+ve) V <sub>hk</sub> =150V (k-ve) R lim. = 1 Megohm Max.	1.0 0.65 0.65	II	I <sub>h</sub> I <sub>hk</sub>	1.5 -	1.8 40	/uA
	Negative Grid Voltage. Anode Current Rise.	V <sub>g1</sub> changed by 6V	0.65 0.65	II	V <sub>g1</sub> I <sub>a</sub>	6.5 70	13.0 95	V mA
	Screen Current.	V <sub>a</sub> = 50V	0.65	II	I <sub>g2</sub>	-	40	mA
	Anode Current.	V <sub>a</sub> =V <sub>g2</sub> =100V V <sub>g1</sub> =0	0.65	II	I <sub>a</sub>	164	-	mA
	<u>GROUP C</u> Anode Current Tail. Screen Current. Change in V <sub>g2</sub> .	Combined AQL V <sub>g1</sub> = -60V Reduce V <sub>g1</sub> by 6V Change V <sub>g2</sub> to maintain I <sub>a</sub> =200mA	6.5 2.5 2.5 2.5	II II II	I <sub>a</sub> I <sub>g2</sub> V <sub>g2</sub>	- - 27	5.0 19.5 4.3	mA mA V

K1001	Test	Test Conditions	AQL %	Insp. Level	Symbol	Limits		Units
						Min.	Max.	
<b>GROUP D</b>								
11.2	Resonance Search	Frequency Range = 25 to 500 c/s Accel: 2g min. $V_a(b)$ = 200V, $V_{g2}$ = 100V $R_L$ = 1.2 k $\Omega$ $I_a$ = 100 mA Circuit as for noise and microphony.	2.5	IC	$V_a$ (AC)	-	300	mV(rms) ←
11.3	Fatigue	Frequency 170 c/s Accel: 2.0g min. Duration 100 hrs. divided in 30,30, 39 hrs. $V_h$ 6.9V switched 1 min. on 3 mins. off.		IA				←
<b>Post Fatigue Tests</b>								
11.4	Noise and Microphony.	Frequency 50 c/s Accel: 2g min. $V_a(b)$ = 200V, $V_{g2}$ = 100V $R_L$ = 1.2 k $\Omega$ $I_a$ = 100 mA	6.5		$V_a$ (AC)	-	1500	mV(rms) ←
	Heater Cathode Leakage.	$V_{hk}$ = 350V (k+ve)	2.5		$I_{hk}$	-	80	/mA
	Reverse Grid Current.		2.5		$I_{g1}$	-	4.0	/mA
	Screen Current		2.5		$I_{g2}$	-	19.5	mA
<b>Shock</b>								
	Hammer angle 30° 5 shocks in each of four directions				IA			
	Noise and Microphony.	Frequency = 50 c/s Accel: 2g min. $V_a(b)$ = 200V, $V_{g2}$ = 100V $R_L$ = 1.2 k $\Omega$ $I_a$ = 100 mA	2.5		$V_a$ (AC)	-	300	mV(rms) ←
	Heater-Cathode Leakage	$V_{hk}$ = 350V (k + ve)	2.5		$I_{hk}$	-	80	/mA
	Reverse Grid Current.		2.5		$I_{g1}$	-	4.0	/mA
<b>GROUP E</b>								
A.D/ 2.5	Electrical re-test after 28 days holding period.				100%			
A.V/ 5.6	Inoperatives		0.5					
	Reverse Grid Current		0.5		$I_{g1}$	-	3.0	/mA ←

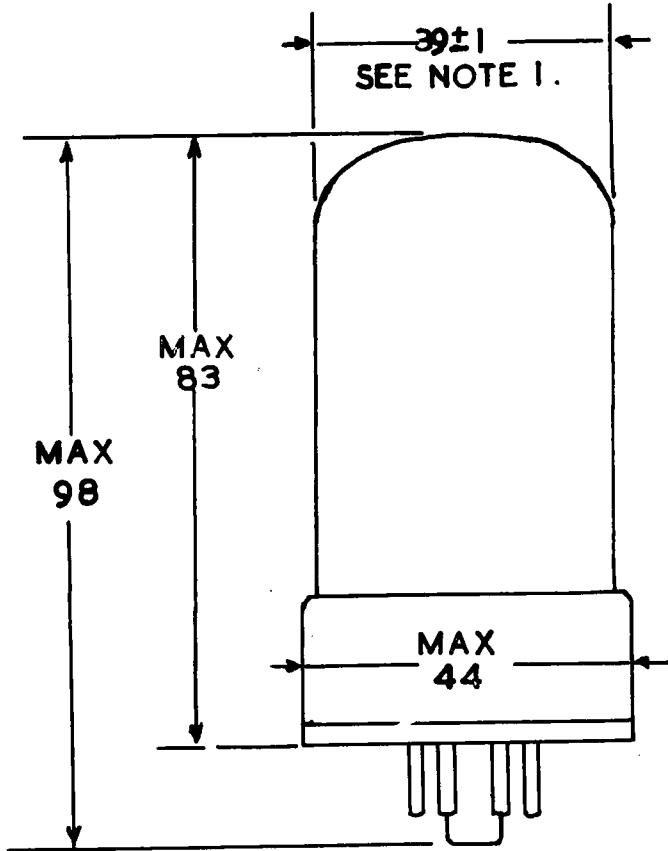

1. THESE TOLERANCES TO INCLUDE VARIATIONS DUE TO  
OVALITY AND TAPER.

2. A PARALLEL SIDED BULB IS MANDATORY.

ALL DIMENSIONS ARE IN MILLIMETERS.