



T.			U_f	I_f	Cl.	U_a	U_g	I_a	I_g	$U_{g\approx}$	P_{dr}	$R_{a/a}$	P_o	P_a
			V	A		V	V	mA	mA	V	W	k Ω	W	W
830-B	amer	1	10	2	C-Tgr	600	- 95	140	30	235	7	maximum (f=15 MHz)	45	60
						800	-105	140	30	245	7		70	
						1000	-110	140	30	250	7		90	
						1000	-300	150	30					
					C-Tlf A-Mod	600	-140	95	30	255	7	maximum	38	
						800	-150	95	20	265	5		50	
					B-Tlf	800	-300	100	30			maximum	40	
						800	- 27	95	7	85	9		23	
						1000	- 35	85	6	85	6		26	
					B(\approx) Modul	800	- 27	$(10 \div 140) \times 2$	7	125×2	$2,5 \times 2$	maximum	23	
						1000	- 35	$(10 \div 140) \times 2$	6	135×2	3×2		26	
						1000		150					60	



830-B

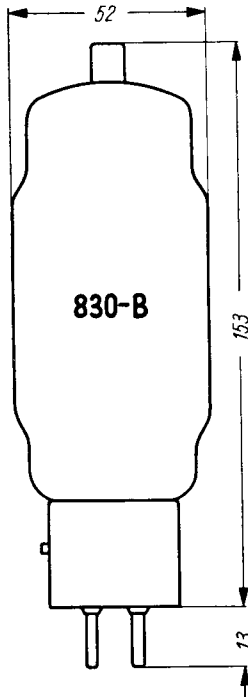

C_g	C_a	$C_{g/a}$
pF	pF	pF
5	1,8	11

Equivalentents

C 830-B	amer
930	amer
930-B	amer

