
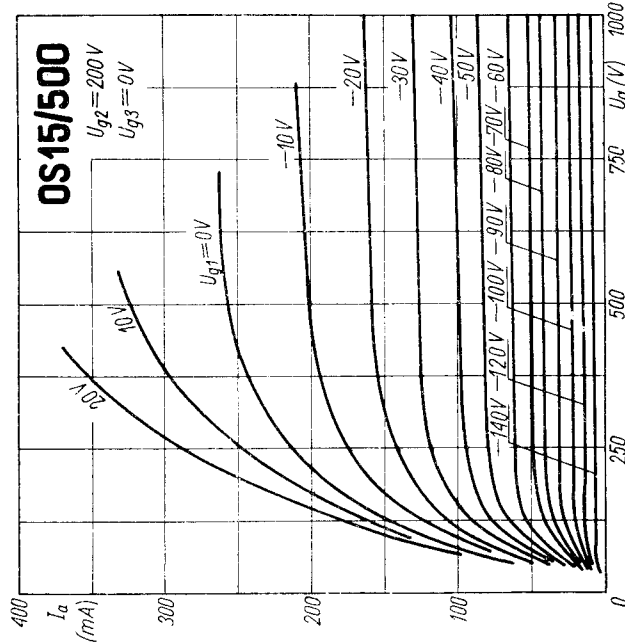


T.	Image	Image	$U_f$	$I_f$	Cl.	$U_a$	$U_{g2}$	$U_{g3}$	$U_{g1}$	$I_a$	$I_{g2}$	$I_{g1}$	$U_{g1} \approx$	$P_{dr}$	$P_o$	$P_{g2}$	$P_a$	
																		V
OS 15/500	Tu	1	12	0,38	C-Tgr	400	300	0	-150	58	15	5	180	0,9	10			
						500	300	0	-150	58	15	5	180	0,9	14			
						500	200	0	-160	22	20	4	180	0,7	7			
						500	125	0	-110	38	12	8	140	1,2	4,5			
						500	275	40	-240	20	18	1,5	250	0,4	3,5			
					stat.	500	300			40								


$S = 1,6 \text{ mA/V}; I'_{(g2/g1)} = 3$   
 maximum  $f = 20 \text{ MHz}; I_k = 85 \text{ mA}; U_{fik} = 200 \text{ V}$

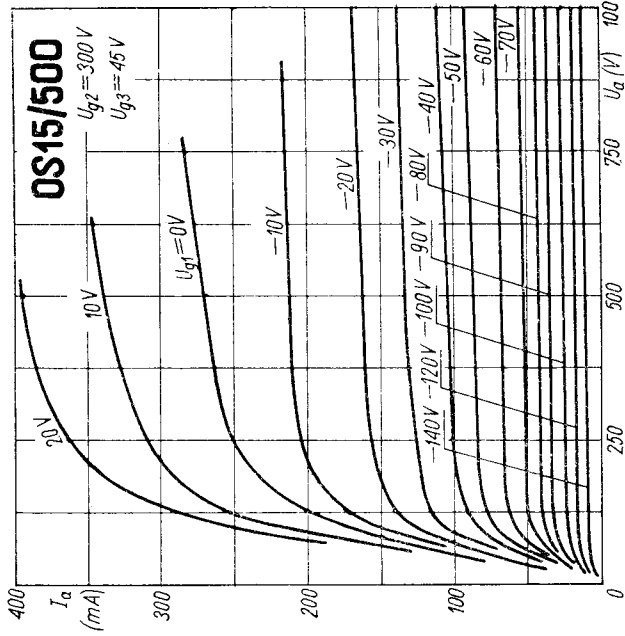

T.	$C_{g1}$		$C_a$		$C_{g1/a}$	
	pF	pF	pF	pF	pF	pF
OS 15/500	11	8	0,015			
PE 05/15	12,7	5,7	0,12			
PV 05-15	12,7	5,7	0,03			
5 Y 15	12	6,5	0,01			

**Equivalents**

- PE 05/15      Phi
- PV 05-15    MuJ
- 5 Y 15        Maz



OS15/500

