


TUNG-SOL


PENTODE SUBMINIATURE TYPE

RELIABLE
SEMI-REMOTE-CUTOFF
PENTODE
FOR
AGC AMPLIFIER SERVICE
IN MOBILE AND AIRBORNE
EQUIPMENT



GLASS BULB
OUTLINE DRAWING
JEDEC 3-6
DOT IS ADJACENT
TO LEAD #1

COATED UNIPOTENTIAL CATHODE
ANY MOUNTING POSITION



BOTTOM VIEW
7 LEADS 0.048"
CENTER-TO-CENTER
IN-LINE
LEAD DIAMETER
.016" +.002" -.001"

THE 6872 IS A HEATER-CATHODE TYPE SEMI-REMOTE CUTOFF PENTODE OF SUBMINIATURE CONSTRUCTION. IT IS APPLICABLE TO AMPLIFIER SERVICE IN WHICH AGC IS DESIRABLE. STANDARD IN-LINE SUBMINIATURE SOCKETS MAY BE USED BY CUTTING THE FLEXIBLE LEADS TO A SUITABLE LENGTH.

DIRECT INTERELECTRODE CAPACITANCES

WITH A CYLINDRICAL SHIELD 0.405" I.D. - 1-7/8" LONG CONNECTED TO LEAD 6.

	MAX.		
GRID 1 TO PLATE	0.03		pf
INPUT	5.0		pf
OUTPUT	3.5		pf

HEATER CHARACTERISTICS AND RATINGS

DESIGN MAXIMUM VALUES - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	6.3	VOLTS	200	MA.
LIMITS OF APPLIED VOLTAGE	6.3 ± 0.6			VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE:	200			VOLTS

MAXIMUM RATINGS

DESIGN MAXIMUM VALUES - SEE EIA STANDARD RS-239

PLATE VOLTAGE	165	VOLTS
GRID 1 VOLTAGE	-55	VOLTS
GRID 2 VOLTAGE	155	VOLTS
GRID 3 VOLTAGE	0	VOLTS
PLATE DISSIPATION	1.1	WATTS
GRID 2 DISSIPATION	0.4	WATTS
CATHODE CURRENT	16.5	MA.
GRID 1 CIRCUIT RESISTANCE	1.2	MEGOHMS
TEMPERATURE AT HOTTEST POINT ON BULB	+220	°C

TUNG-SOL



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CHARACTERISTICS

PLATE VOLTAGE	120	VOLTS
GRID 1 VOLTAGE	0	VOLTS
GRID 2 VOLTAGE	120	VOLTS
GRID 3 VOLTAGE	0	VOLTS
CATHODE BIAS RESISTOR	200	OHMS
PLATE CURRENT	7.75	MA.
GRID 2 CURRENT	2.7	MA.
TRANSCONDUCTANCE	4,100	μ MHOS
PLATE RESISTANCE	0.34	MEGOHMS

SPECIAL TESTS AND RATINGS

INTERMITTANT LIFE TEST		
HEATER CYCLING TEST		
SHOCK TEST		
VIBRATION TEST		
ALTITUDE RATING	60,000	FEET

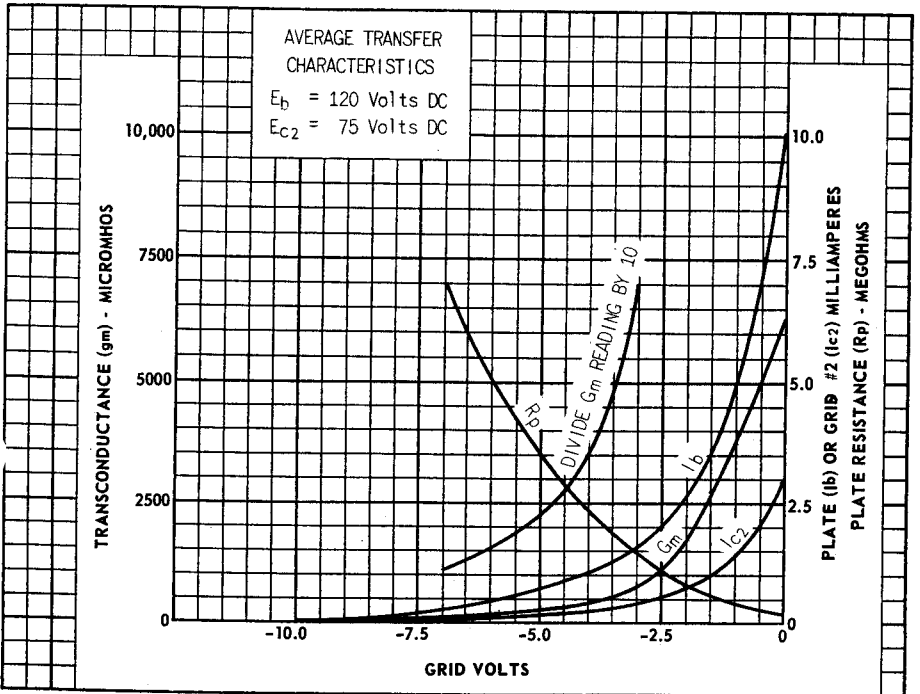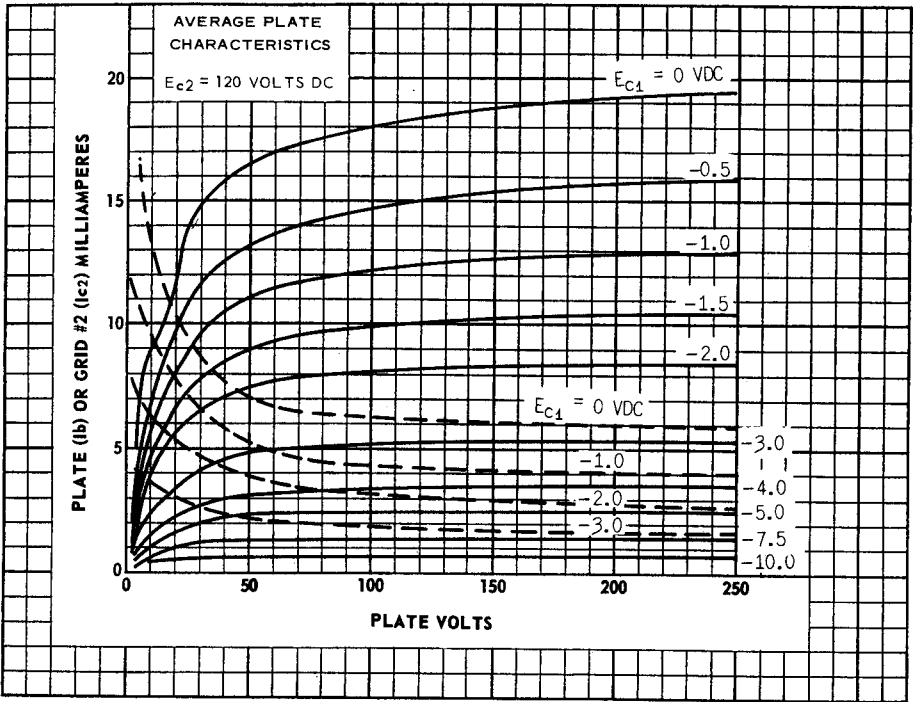

PRINTED IN U. S. A.

