



DESCRIPTION

The Sylvania Types 5CEP11 and 5CEP16 are 5-inch diameter Cathode Ray Tubes designed for high resolution photographic recording and high resolution flying spot scanning applications respectively. They have electrostatic focus, magnetic deflection, and are capable of producing a line width of 0.0015 inch. The tubes have flat, neutral gray, non-browning optical glass faceplates for optimum photographic quality. Both types have aluminized phosphors to increase display brightness. An integral encapsulated high voltage connector is utilized to minimize corona at high altitude.

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angle (Approx.)	42 Degrees
Phosphor*	5CEP16 P16 5CEP11 Fine Grain P11, Aluminized Blue
Fluorescence	Violet and Near Ultra-Violet
Persistence	Extremely Short Short
Faceplate	Gray, Non-Browning Optical Glass

*In addition to the types shown, the 5CEP can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 10 % Ampere
Direct Interelectrode Capacitances (Approx.)	
Grid No. 1 to All Other Electrodes	9 pf
Grid No. 2 to All Other Electrodes	7 pf
Cathode to All Other Electrodes	7 pf

MECHANICAL DATA

Minimum Useful Screen Diameter	4 1/4 Inches
Overall Length	13 ± 1/2 Inches
Bulb Diameter	5 1/4 ± 1/16 Inches
Anode Terminal	16" HV Cable, Corona Protected
Base	B6-63
Basing	12Q



RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts dc
Grid No. 3 (Focus) Voltage	5000 Volts dc
Grid No. 2 Voltage	600 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	180 Volts dc
Positive Bias Value	0 Volt
Positive Peak Value	0 Volt
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

QUICK REFERENCE DATA

- High Resolution Tube
- .0015" Line Width
- 5-Inch, Flat, Optical Glass Faceplate
- Clear Non-Browning Faceplate
- Extremely Fine Grain Screen
- Aluminized Screen
- Magnetic Deflection
- Electrostatic Focus
- No Ion Trap

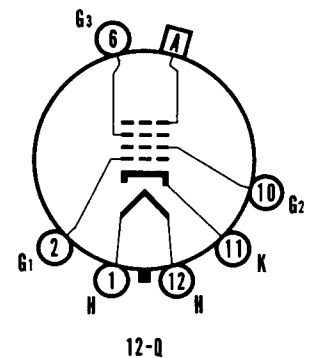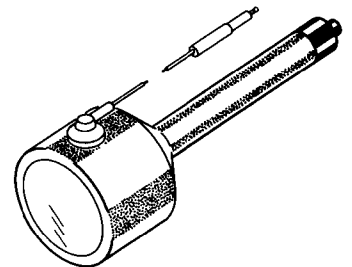

SYLVANIA ELECTRIC PRODUCTS INC.

**Electronic Components Group
ELECTRONIC TUBE DIVISION
SENECA FALLS, NEW YORK**

A Technical Publication

JUNE, 1964

PAGE 1 OF 2

File Under

**SPECIAL AND GENERAL
PURPOSE CATHODE RAY TUBES**

TYPICAL OPERATING CONDITIONS

Anode Voltage	10,000	20,000 Volts
Grid No. 3 (Focus) Voltage ¹	2070-2370	4140-4740 Volts
Grid No. 2 Voltage	300	300 Volts
Grid No. 1 Cutoff Voltage ²	-40 to -65	-40 to -65 Volts
Line Width ³	0.0015	0.0015 Inch

CIRCUIT VALUES

Grid No. 1 Circuit Resistance 1.5 Megohms Max.

NOTES:

1. The Grid No. 3 focus supply should be capable of 250 μ a average current. Due to the extreme fineness of the line, it is recommended that focus modulation (dynamic focus) be used.
2. Visual extinction of undeflected focused spot.
3. Line width measured at 5 μ a by the shrinking raster method.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage of 16,000 volts, whichever is less.

OUTLINE

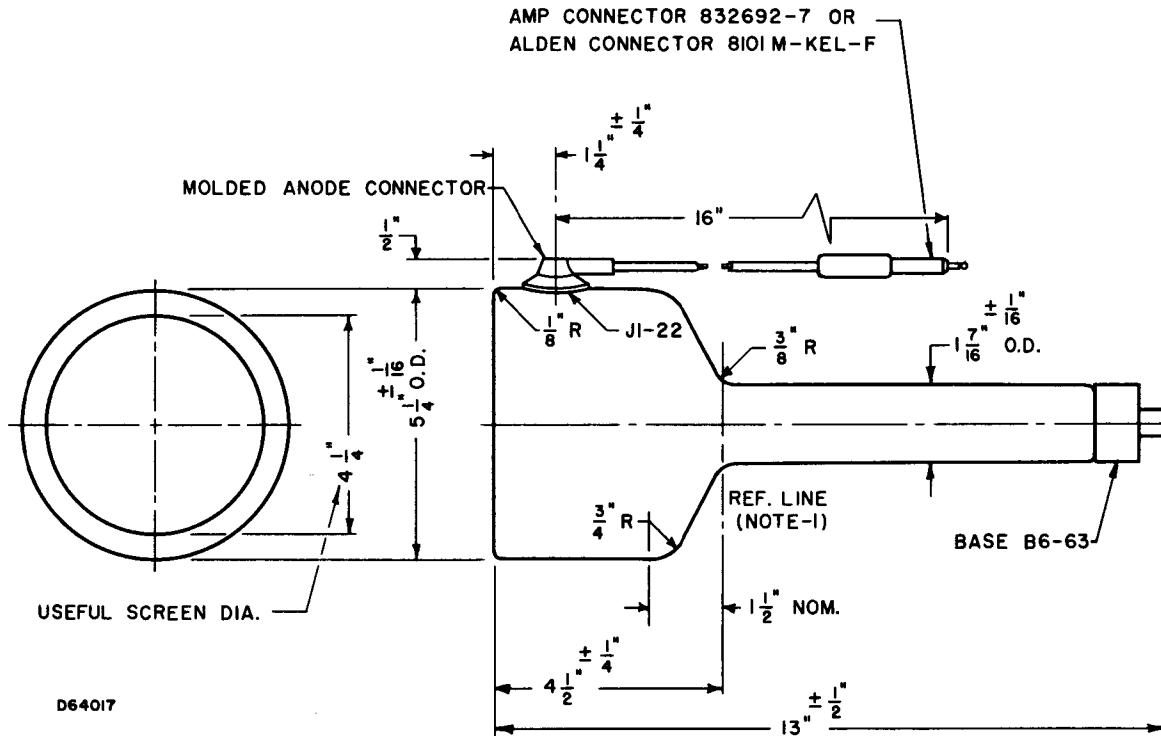


DIAGRAM NOTES:

1. Yoke Reference Line is the plane where a 1.500" + 0.003", -0.000" I.D. Ring Gage will stop.
2. Molded Anode Connector alignment with vacant pin Position No. 3 has angular tolerance of $\pm 10^\circ$ measured about the tube axis.