

**Amperex** ELECTRONIC CORPORATION  
230 DUFFY AVENUE, HICKSVILLE, L. I., N. Y.

TYPE  
8228/ZZ1000  
VOLTAGE  
REFERENCE  
TUBE

TENTATIVE DATA

The Amperex 8228/ZZ1000 is a subminiature cold-cathode voltage reference tube for use in stable regulated power supplies, dc amplifiers, oscilloscope calibrators and similar applications.

Featuring an extremely low temperature coefficient of .004% per °C, the 8228/ZZ1000 affords excellent regulation and uniformity. The rugged construction of this extremely small voltage reference tube insures reliability. It is guaranteed for a minimum life of 30,000 hours,

GENERAL CHARACTERISTICS

ELECTRICAL

Maximum Ratings, Absolute Values



D.C. Starting Voltage (min)	115 volts <sup>1</sup>
D.C. Operating Cathode Current (max)	3.5 ma
D.C. Operating Cathode Current (min)	.5 ma
Inverse Peak Voltage	70 volts
Bulb Temperature Limits	-55 to +100°C <sup>2</sup>
Impact Acceleration (max)	450 g
Vibrational Acceleration for extended periods	2.5 g
Altitude	78,500 ft

Typical Operation

Recommended D.C. Operating Current	2 ma
A.C. Resistance at 2 ma (max)	500 ohms <sup>3</sup>
D.C. Operating Voltage at 2 ma	82 volts
D.C. Operating Voltage	84 volts max
$I_k = 0.5$ to $3.5$ ma	81 volts min

Regulation

$I_k = 0.5$ to $3.5$ ma	1 volt
-------------------------	--------

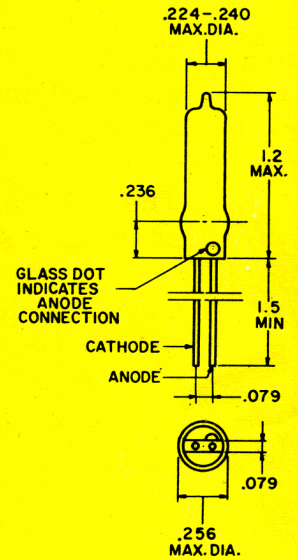

JETEC T2

1. The anode breakdown voltage delay time is 5 msec max and is independent of ambient illumination.
2. The temperature rise of the bulb over the ambient temperature at  $I_k = 3.5$  ma is approximately 25°C.
3. Measured with an alternating current of 1 ma rms at 1000 cps.

**Amperex**

## ELECTRICAL (Continued)

### Noise Voltage

$I_k = 0.5$  to  $3.5$  ma

Frequency Band: 10 cycles to 10 kc

N = 0.5 volts max

### Temperature Coefficient of Operating Voltage

-3.0 mv/ $^{\circ}$ C<sup>4</sup>

(.004 %/ $^{\circ}$ C)

### Change in Operating Voltage

During First 1000 hours of Life

( $I_k = 2$  ma,  $T_A = 25^{\circ}$ C)

500 mv max

### Life Expectancy - Continuous

Operation ( $I_k = 2$  ma)

30,000 hours min

## SOLDERING PRECAUTIONS

The tube may be soldered directly into the circuit but heat conducted to the glass-to-metal seals should be kept to a minimum by the use of a thermal shunt.

The connecting leads may be dip-soldered to a minimum of 3/16" from the seals at a solder temperature of 240 $^{\circ}$ C for a maximum of 10 seconds.

Care should be taken not to bend the leads closer than 1/16" to the seals.

4. Averaged over the range -55 $^{\circ}$ C to + 70 $^{\circ}$ C.