

SINGLE ANODE E.H.T. RECTIFYING TUBE

Single anode E.H.T. rectifying tube intended for use in colour television receivers.

The GY501 has a chemically treated envelope to avoid flash-over under conditions of high humidity and low atmospheric pressure (45 cm Hg).

QUICK REFERENCE DATA

D.C. output voltage	V_o	25 kV
Anode current	I_a	1.5 mA



HEATING: Indirect by A.C. or D.C.; parallel supply

Heater voltage V_f 3.15 V¹⁾

Heater current I_f 400 mA

DIMENSIONS AND CONNECTIONS

Base: Magnoval

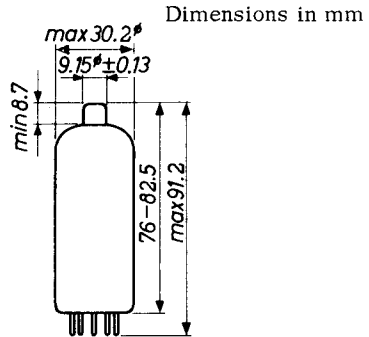

Pins 1, 5 and 9 may be used to connect an anti-corona ring.

Circuit elements having the same potential as the heater (e.g. a series resistor) may be connected to pins 3 and 7. These pins must never be earthed.

Precaution: X-ray shielding may be required to give protection against excessive radiation.

¹⁾ Under nominal operating conditions and with the longterm average value of I_a to be expected in practice, V_{fRMS} should be 3.15 V. ...

The heater voltage deviation resulting from spread or variation of operating conditions should be limited to the values indicated by the diagram in fig. A.

CAPACITANCES

Anode to cathode C_{ak} 1.2 pF

OPERATING CHARACTERISTICS

Output voltage V_o 25 kV

Anode current I_a 1.5 mA

LIMITING VALUES (Design centre rating system)

Peak inverse voltage (absolute max.) V_{ainvp} max. 35 kV ¹⁾

Output voltage (absolute max.) V_o max. 27.5 kV

Output current, average I_o max. 1.7 mA


peak I_{op} max. 100 mA ²⁾


¹⁾ The negative peak due to ringing in the line output transformer should be taken into account.

Max. pulse duration 22% of a cycle and 18 μ s.

²⁾ Design max. rating system

Max. pulse duration 10% of a line scanning cycle with a max. of 10 μ s.

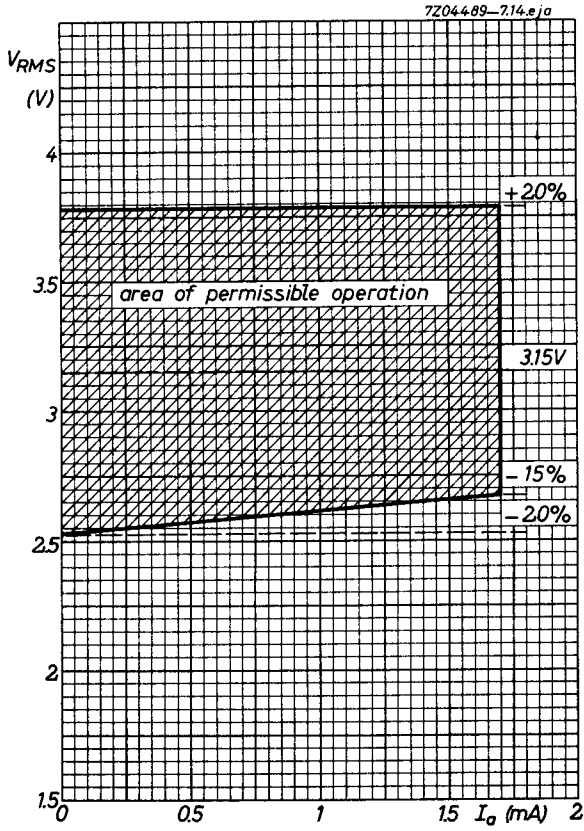

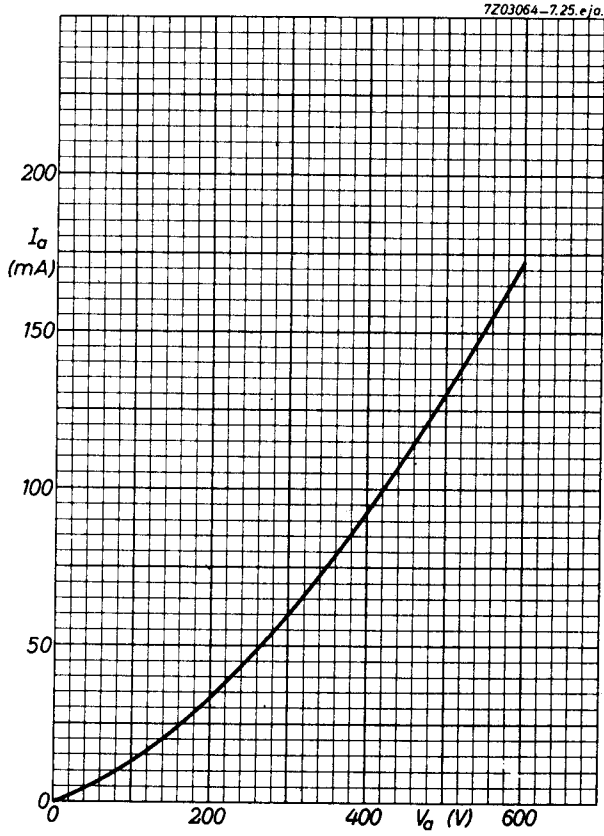

PHILIPS

Data handbook



Electronic
components
and materials

GY501

page	sheet	date
1	1	1969.12
2	2	1969.12
3	3	1969.12
4	4	1969.12
5	FP	1999.08.07